

## QIAOXIN N-Channel Super Trench Power MOSFET

### Description


The VCRR40T35AVD uses **Super Trench** technology that is uniquely optimized to provide the most efficient high frequency switching performance. Both conduction and switching power losses are minimized due to an extremely low combination of  $R_{DS(ON)}$  and  $Q_g$ . This device is ideal for high-frequency switching and synchronous rectification.

### Application


- DC/DC Converter
- Ideal for high-frequency switching and synchronous rectification

### General Features

- $V_{DS} = 40V, I_D = 350A$   
 $R_{DS(ON)} = 0.68m\Omega$  (typical) @  $V_{GS} = 10V$
- Excellent gate charge x  $R_{DS(on)}$  product(FOM)
- Very low on-resistance  $R_{DS(on)}$
- 175 °C operating temperature
- Pb-free lead plating



Schematic diagram



TO-263-7L top view

### Package Marking and Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity
VCRR40T35AVD		TO-263-7L	-	-	-

### Absolute Maximum Ratings ( $T_C = 25^\circ C$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	$V_{DS}$	40	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Drain Current-Continuous	$I_D$	350	A
Drain Current-Continuous( $T_C = 100^\circ C$ )	$I_D(100^\circ C)$	245	A
Pulsed Drain Current	$I_{DM}$	1400	A
Maximum Power Dissipation	$P_D$	380	W
Derating factor		2.53	W/ $^\circ C$
Single pulse avalanche energy (Note 1)	$E_{AS}$	3000	mJ
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 To 175	$^\circ C$

### Thermal Characteristic

Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	0.39	$^\circ C/W$
--------------------------------------	-----------------	------	--------------


### Electrical Characteristics (T<sub>c</sub>=25°C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
<b>Off Characteristics</b>						
Drain-Source Breakdown Voltage	BV <sub>DSS</sub>	V <sub>GS</sub> =0V, I <sub>D</sub> =250μA	43		-	V
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> =40V, V <sub>GS</sub> =0V	-	-	1	μA
Gate-Body Leakage Current	I <sub>GSS</sub>	V <sub>GS</sub> =±20V, V <sub>DS</sub> =0V	-	-	±100	nA
<b>On Characteristics</b>						
Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250μA	2.0	3.0	4.0	V
Drain-Source On-State Resistance	R <sub>DS(ON)</sub>	V <sub>GS</sub> =10V, I <sub>D</sub> =175A	-	0.68	0.88	mΩ
Forward Transconductance	g <sub>FS</sub>	V <sub>DS</sub> =5V, I <sub>D</sub> =175A	100	-	-	S
<b>Dynamic Characteristics</b>						
Input Capacitance	C <sub>iss</sub>	V <sub>DS</sub> =20V, V <sub>GS</sub> =0V, F=1.0MHz	-	12850	-	PF
Output Capacitance	C <sub>oss</sub>		-	4641	-	PF
Reverse Transfer Capacitance	C <sub>rss</sub>		-	205	-	PF
<b>Switching Characteristics</b> (Note 2)						
Turn-on Delay Time	t <sub>d(on)</sub>	V <sub>DD</sub> =20V, I <sub>D</sub> =175A V <sub>GS</sub> =10V, R <sub>G</sub> =1.6Ω	-	26	-	nS
Turn-on Rise Time	t <sub>r</sub>		-	14	-	nS
Turn-Off Delay Time	t <sub>d(off)</sub>		-	110	-	nS
Turn-Off Fall Time	t <sub>f</sub>		-	17	-	nS
Total Gate Charge	Q <sub>g</sub>	V <sub>DS</sub> =20V, I <sub>D</sub> =175A, V <sub>GS</sub> =10V	-	156.5	-	nC
Gate-Source Charge	Q <sub>gs</sub>		-	59		nC
Gate-Drain Charge	Q <sub>gd</sub>		-	23.5		nC
<b>Drain-Source Diode Characteristics</b>						
Diode Forward Voltage	V <sub>SD</sub>	V <sub>GS</sub> =0V, I <sub>S</sub> =175A	-		1.2	V
Diode Forward Current	I <sub>S</sub>		-	-	350	A
Reverse Recovery Time	t <sub>rr</sub>	T <sub>J</sub> = 25°C, I <sub>F</sub> = I <sub>S</sub> di/dt = 100A/μs	-	66	-	nS
Reverse Recovery Charge	Q <sub>rr</sub>		-	240	-	nC


#### Notes:

1. EAS condition : T<sub>j</sub>=25°C, V<sub>DD</sub>=20V, V<sub>G</sub>=10V, L=0.5mH, R<sub>G</sub>=25Ω
2. Guaranteed by design, not subject to production
3. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of T<sub>J</sub>(MAX)=175°C. The SOA curve provides a single pulse rating.


**Typical Electrical and Thermal Characteristics**

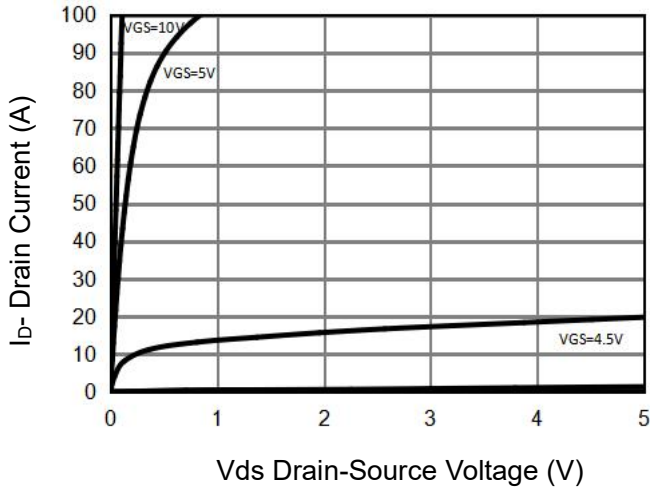


**Figure 1 Output Characteristics**

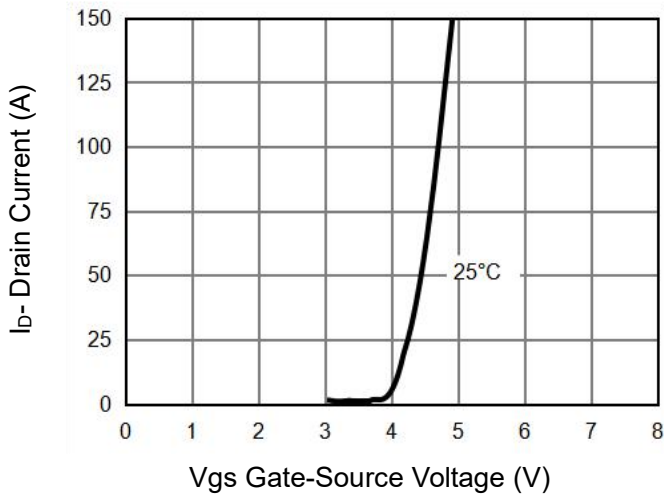


**Figure 2 Transfer Characteristics**

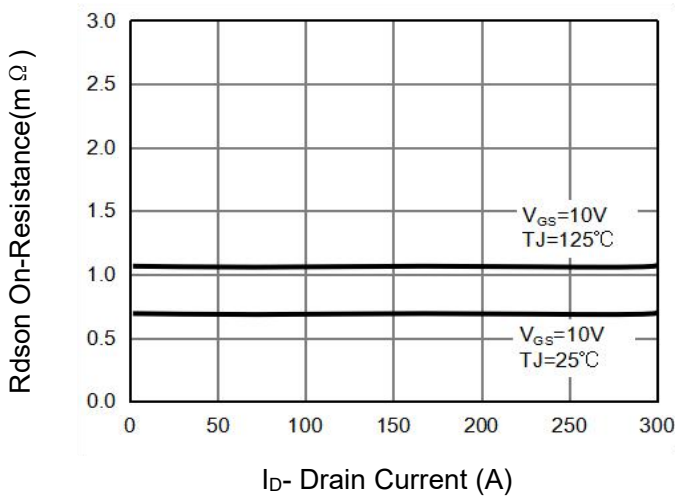


**Figure 3 Rds(on)- Drain Current**

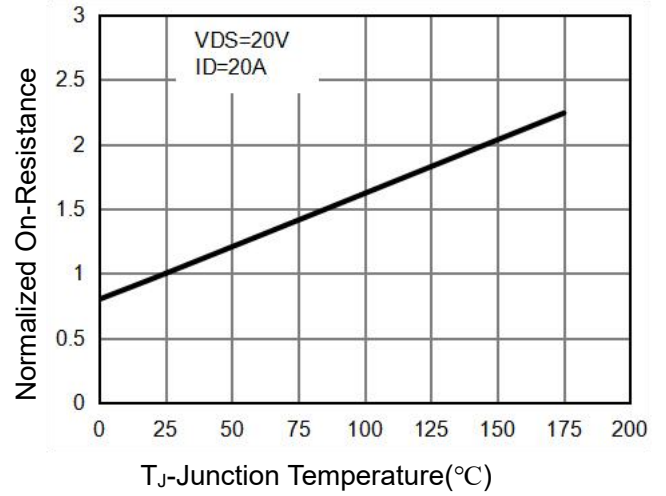


**Figure 4 Rds(on)-Junction Temperature**

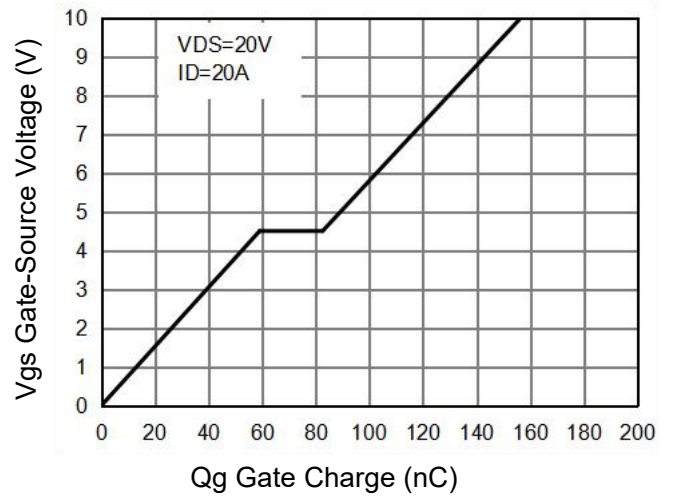


**Figure 5 Gate Charge**

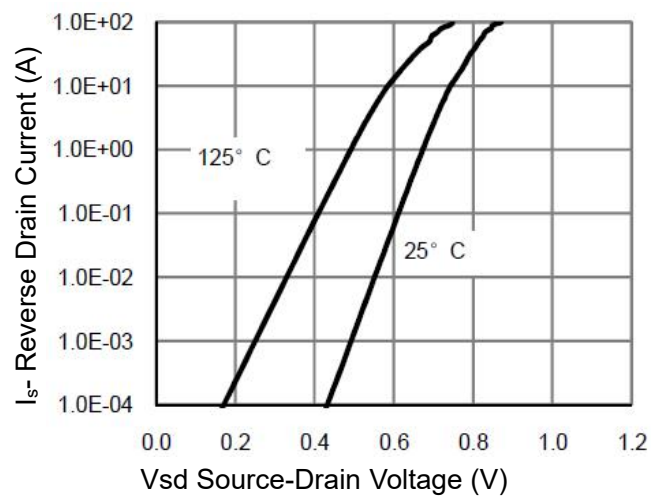


**Figure 6 Source- Drain Diode Forward**

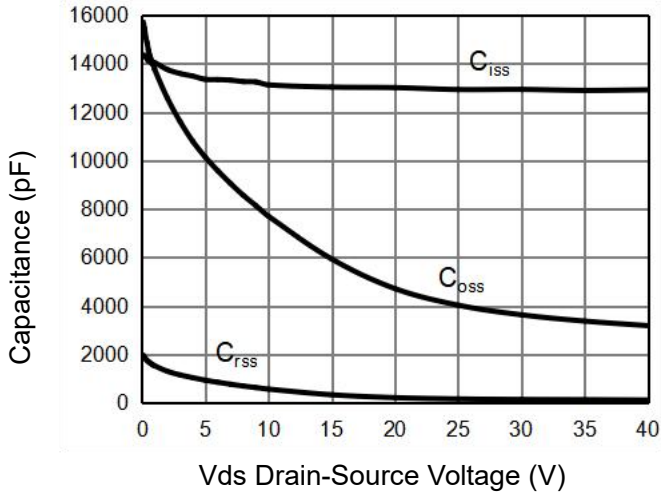


**Figure 7 Capacitance vs Vds**

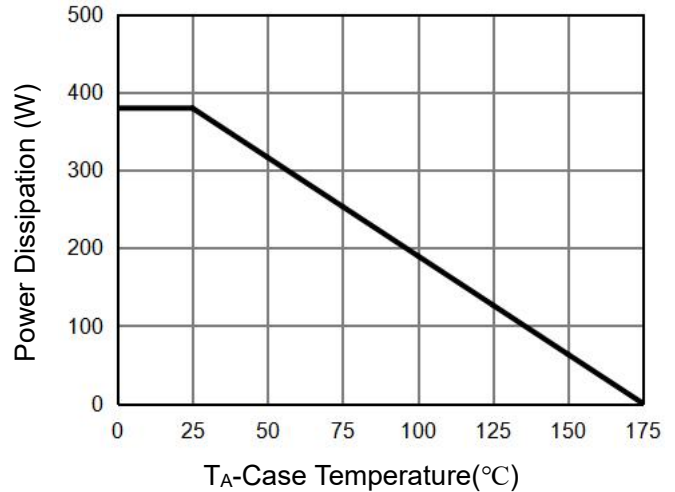


**Figure 9 Power De-rating**

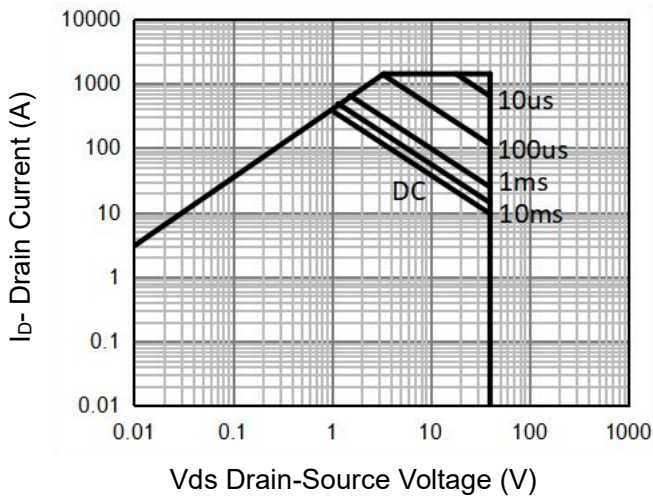

**Figure 8 Safe Operation Area** (Note 3)

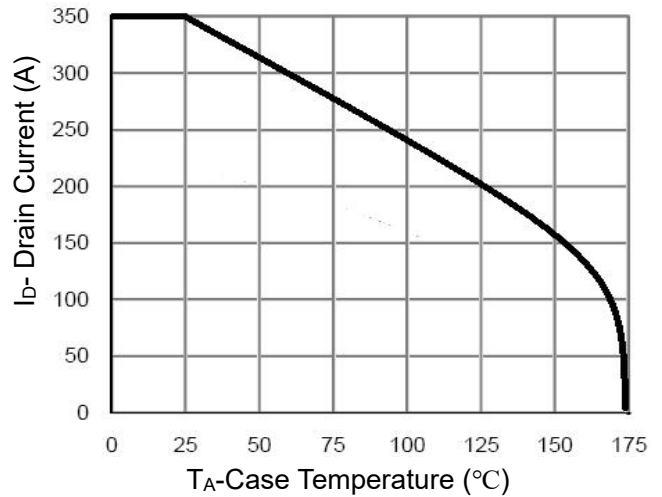


**Figure 10 Current De-rating**

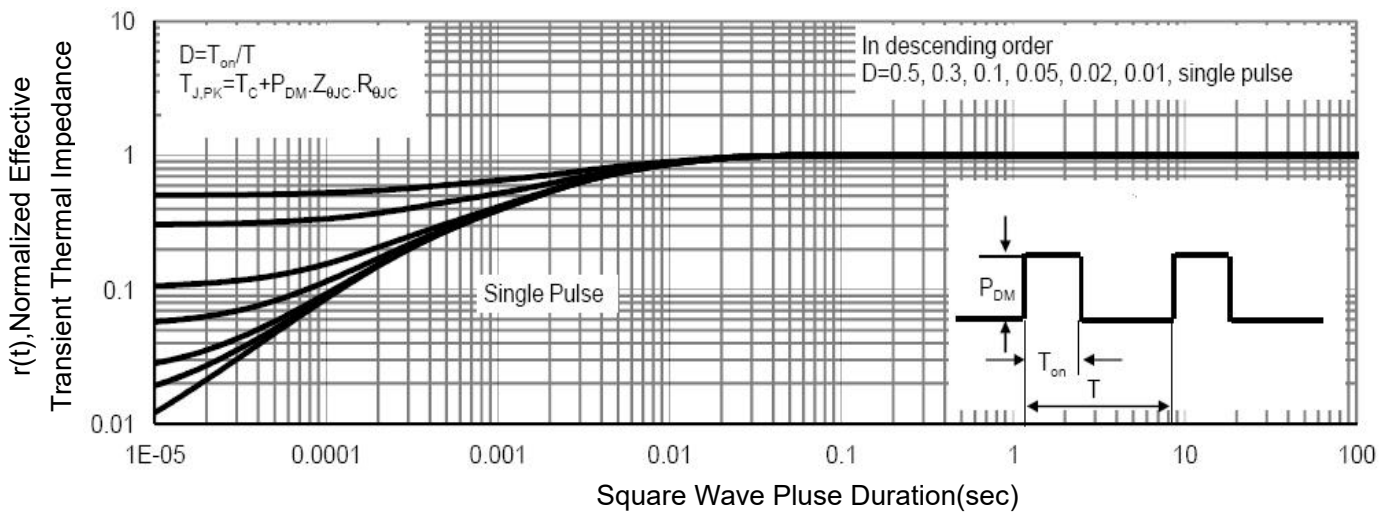


**Figure 11 Normalized Maximum Transient Thermal Impedance**

**TO-263-7L (B) Package Information**

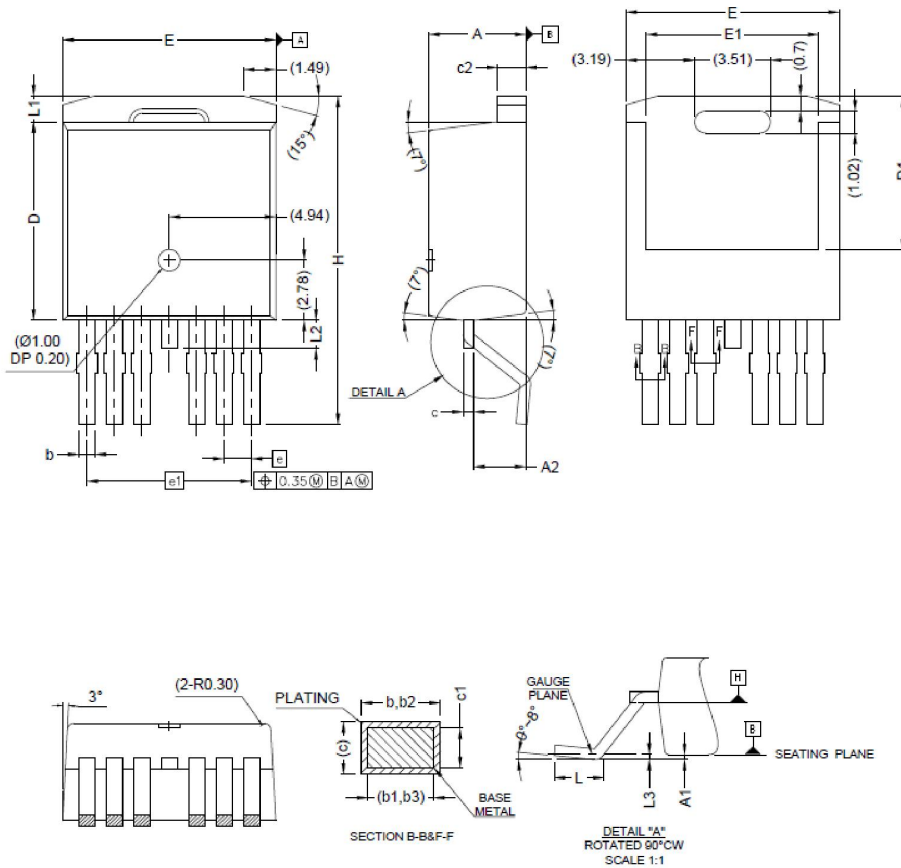

SYMBOL	MIN	MAX
A	4.30	4.70
A1	-	0.25
A2	2.20	2.60
b	0.65	0.85
b1	0.65	0.80
b2	0.80	1.00
b3	0.80	0.95
c	0.45	0.60
c1	0.45	0.55
c2	1.25	1.40
D	9.00	9.40
D1	6.86	7.42
E	9.68	10.08
E1	7.70	8.30
e	1.27 BSC	
e1	7.62 BSC	
L	1.78	2.79
L1	-	1.60
L2	-	1.78
L3	0.25BSC	
H	14.61	15.88

**TO-263-7L (G) Package Information**

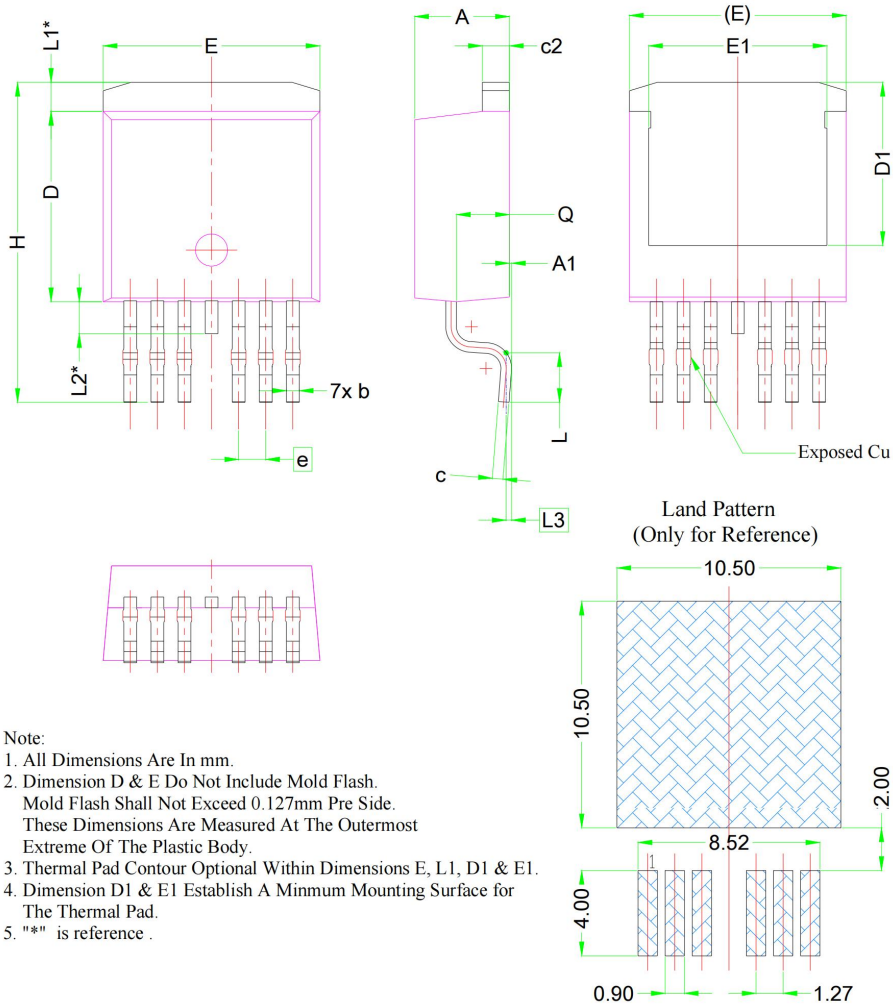

- Note:
1. All Dimensions Are In mm.
  2. Dimension D & E Do Not Include Mold Flash.  
Mold Flash Shall Not Exceed 0.127mm Pre Side.  
These Dimensions Are Measured At The Outermost Extreme Of The Plastic Body.
  3. Thermal Pad Contour Optional Within Dimensions E, L1, D1 & E1.
  4. Dimension D1 & E1 Establish A Minmum Mounting Surface for The Thermal Pad.
  5. "\*" is reference .

SYMBOL	DIMENSIONS		
	MIN.	NOM.	MAX.
A	4.24	4.44	4.64
A1	0.00	0.10	0.25
b	0.50	0.60	0.70
c	0.40	0.50	0.60
c2	1.15	1.27	1.40
D	8.82	8.92	9.02
D1	6.86	7.65	---
E	9.96	10.16	10.36
E1	8.20	8.35	8.50
e	1.27 BSC		
H	14.61	15.00	15.88
L	1.78	2.32	2.79
L1	1.36 REF.		
L2	1.50 REF.		
L3	0.25 BSC		
Q	2.30	2.48	2.70

## Attention

QIAOXIN assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all QIAOXIN products described or contained herein. QIAOXIN products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. QIAOXIN reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.