

QIAOXIN N-Channel **Super Trench II** Power MOSFET

Description

The series of devices uses **Super Trench II** technology that is uniquely optimized to provide the most efficient high frequency switching performance. Both conduction and switching power losses are minimized due to an extremely low combination of $R_{DS(ON)}$ and Q_g . This device is ideal for high-frequency switching and synchronous rectification.


Application

- DC/DC Converter
- Ideal for high-frequency switching and synchronous rectification



General Features

- $V_{DS} = 85V, I_D = 300A$
 $R_{DS(ON)} = 1.8m\Omega$, typical (TO-220) @ $V_{GS} = 10V$
 $R_{DS(ON)} = 1.6m\Omega$, typical (TO-263) @ $V_{GS} = 10V$
- Excellent gate charge x $R_{DS(on)}$ product (FOM)
- Very low on-resistance $R_{DS(on)}$
- 175 °C operating temperature
- Pb-free lead plating

TO-220



TO-263

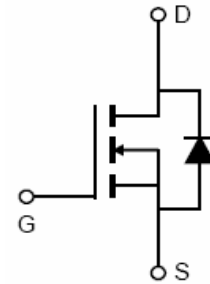

Schematic Diagram

Package Marking and Ordering Information

| Device Marking | Device | Device Package | Reel Size | Tape width | Quantity |
|----------------|--------------|----------------|-----------|------------|----------|
| VCRRP020N85 | VCRRP020N85 | TO-220 | - | - | - |
| VCRRP020N85D | VCRRP020N85D | TO-263 | - | - | - |

Absolute Maximum Ratings ($T_C = 25^\circ C$ unless otherwise noted)

| Parameter | Symbol | Limit | Unit |
|---|--------------------|------------|---------------|
| Drain-Source Voltage | V_{DS} | 85 | V |
| Gate-Source Voltage | V_{GS} | ± 20 | V |
| Drain Current-Continuous | I_D | 300 | A |
| Drain Current-Continuous ($T_C = 100^\circ C$) | $I_D(100^\circ C)$ | 220 | A |
| Pulsed Drain Current | I_{DM} | 1200 | A |
| Maximum Power Dissipation | P_D | 340 | W |
| Derating factor | | 2.27 | W/ $^\circ C$ |
| Single pulse avalanche energy ^(Note 5) | E_{AS} | 2850 | mJ |
| Operating Junction and Storage Temperature Range | T_J, T_{STG} | -55 To 175 | $^\circ C$ |

Thermal Characteristic

| | | | |
|--------------------------------------|-----------------|------|---------------|
| Thermal Resistance, Junction-to-Case | $R_{\theta JC}$ | 0.44 | $^{\circ}C/W$ |
|--------------------------------------|-----------------|------|---------------|

Electrical Characteristics ($T_C=25^{\circ}C$ unless otherwise noted)

| Parameter | Symbol | Condition | Min | Typ | Max | Unit | |
|---|--------------|--|--------|-------|-----------|---------|------------|
| Off Characteristics | | | | | | | |
| Drain-Source Breakdown Voltage | BV_{DSS} | $V_{GS}=0V, I_D=250\mu A$ | 85 | | - | V | |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{DS}=85V, V_{GS}=0V$ | - | - | 1 | μA | |
| Gate-Body Leakage Current | I_{GSS} | $V_{GS}=\pm 20V, V_{DS}=0V$ | - | - | ± 100 | nA | |
| On Characteristics (Note 3) | | | | | | | |
| Gate Threshold Voltage | $V_{GS(th)}$ | $V_{DS}=V_{GS}, I_D=250\mu A$ | 2.0 | 3.0 | 4.0 | V | |
| Drain-Source On-State Resistance | $R_{DS(on)}$ | $V_{GS}=10V, I_D=150A$ | TO-220 | - | 1.8 | 2.0 | m Ω |
| | | | TO-263 | | 1.6 | 2.0 | m Ω |
| Forward Transconductance | g_{FS} | $V_{DS}=5V, I_D=150A$ | | 210 | - | S | |
| Dynamic Characteristics (Note 4) | | | | | | | |
| Input Capacitance | C_{iss} | $V_{DS}=40V, V_{GS}=0V,$ $F=1.0MHz$ | - | 15800 | - | PF | |
| Output Capacitance | C_{oss} | | - | 2450 | - | PF | |
| Reverse Transfer Capacitance | C_{rss} | | - | 111 | - | PF | |
| Switching Characteristics (Note 4) | | | | | | | |
| Turn-on Delay Time | $t_{d(on)}$ | $V_{DD}=40V, I_D=150A$ $V_{GS}=10V, R_G=1.6\Omega$ | - | 43 | - | nS | |
| Turn-on Rise Time | t_r | | - | 39 | - | nS | |
| Turn-Off Delay Time | $t_{d(off)}$ | | - | 108 | - | nS | |
| Turn-Off Fall Time | t_f | | - | 40 | - | nS | |
| Total Gate Charge | Q_g | $V_{DS}=40V, I_D=150A,$ $V_{GS}=10V$ | - | 245 | - | nC | |
| Gate-Source Charge | Q_{gs} | | - | 66 | | nC | |
| Gate-Drain Charge | Q_{gd} | | - | 65 | | nC | |
| Drain-Source Diode Characteristics | | | | | | | |
| Diode Forward Voltage (Note 3) | V_{SD} | $V_{GS}=0V, I_S=150A$ | - | | 1.2 | V | |
| Diode Forward Current | I_S | | - | - | 300 | A | |
| Reverse Recovery Time | t_{rr} | $T_J = 25^{\circ}C, I_F = 150A$ $di/dt = 100A/\mu s$ (Note 3) | - | 109 | - | nS | |
| Reverse Recovery Charge | Q_{rr} | | - | 315 | - | nC | |

Notes:

1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, $t \leq 10$ sec.
3. Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.
4. Guaranteed by design, not subject to production
5. EAS condition : $T_J=25^{\circ}C, V_{DD}=40V, V_G=10V, L=0.5mH, R_g=25\Omega$

Typical Electrical and Thermal Characteristics

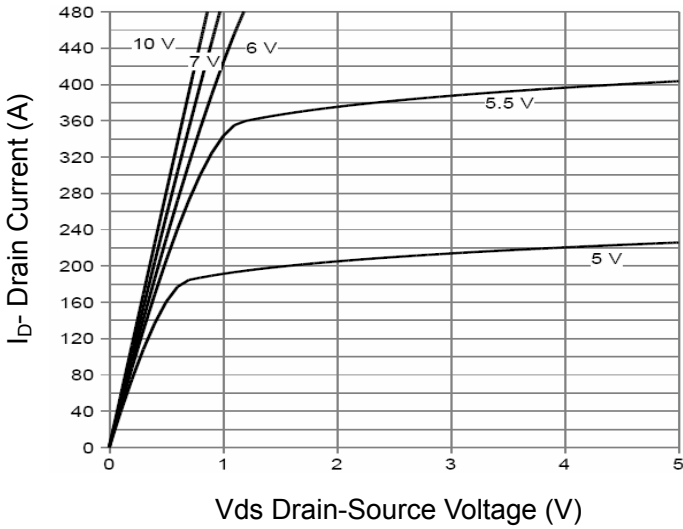


Figure 1 Output Characteristics

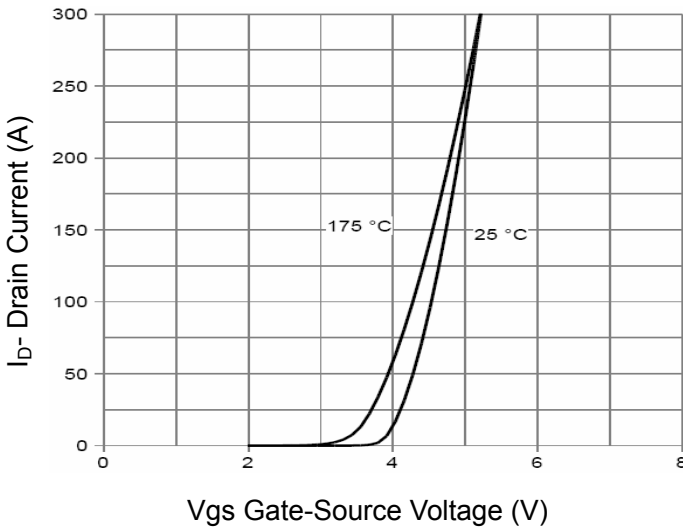


Figure 2 Transfer Characteristics

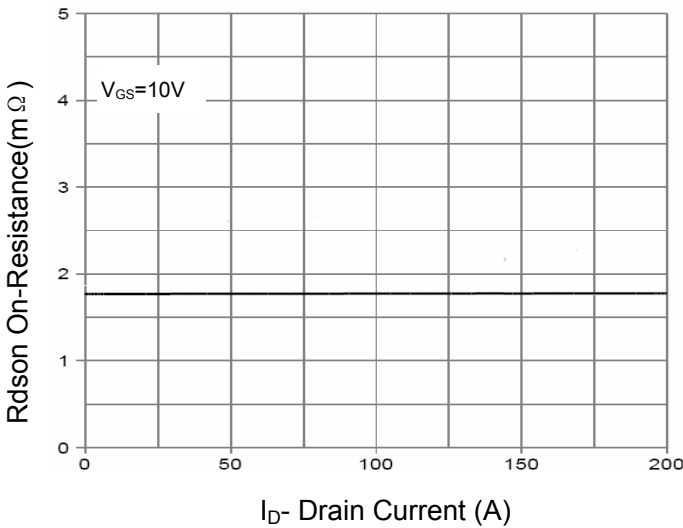


Figure 3 Rdson- Drain Current

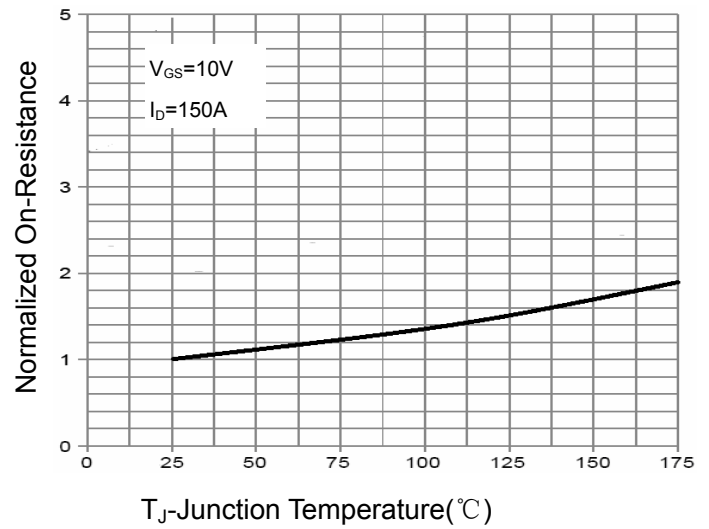


Figure 4 Rdson-Junction Temperature

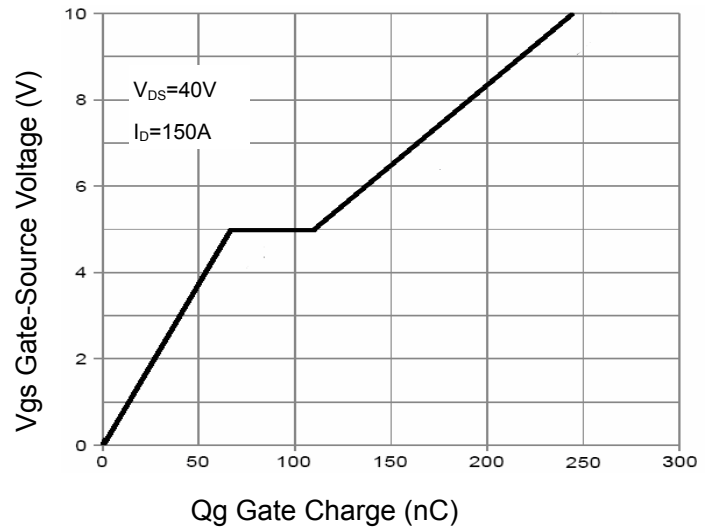


Figure 5 Gate Charge



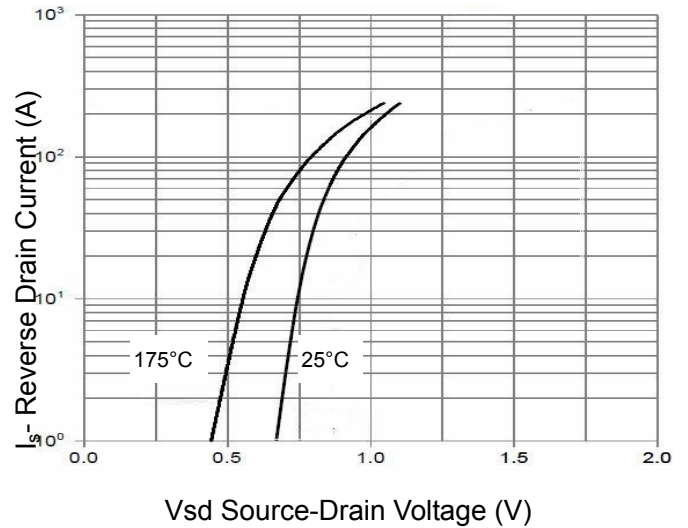



Figure 6 Source- Drain Diode Forward

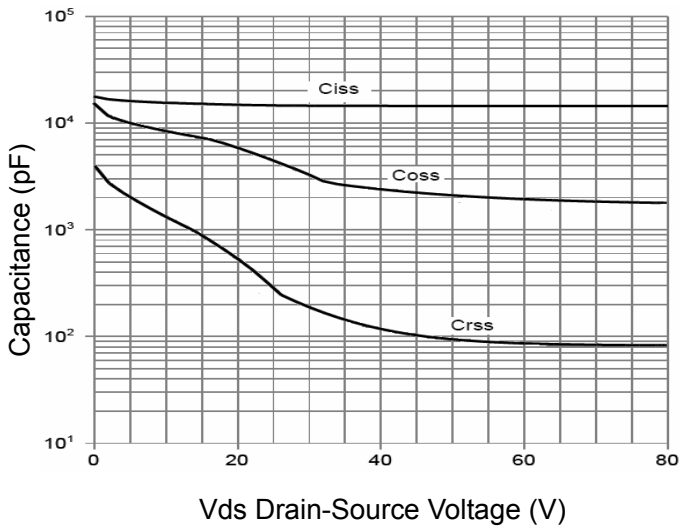


Vds Drain-Source Voltage (V)
Figure 7 Capacitance vs Vds

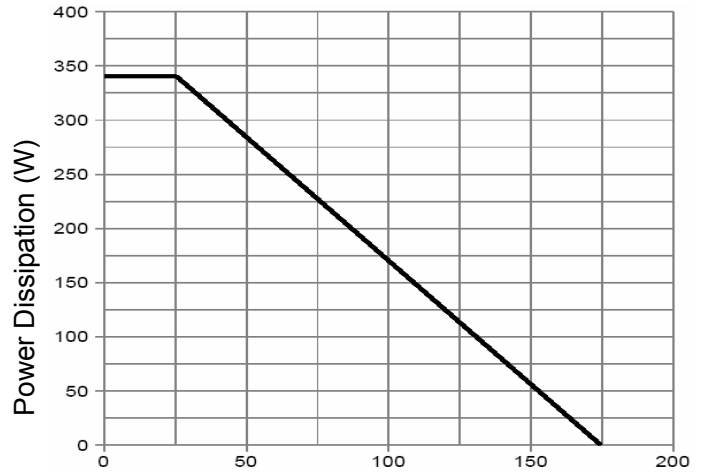


T_J-Junction Temperature(°C)
Figure 9 Power De-rating

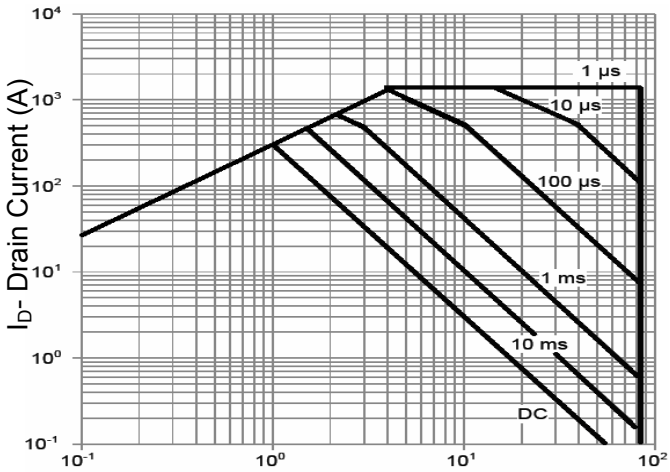

Vds Drain-Source Voltage (V)
Figure 8 Safe Operation Area

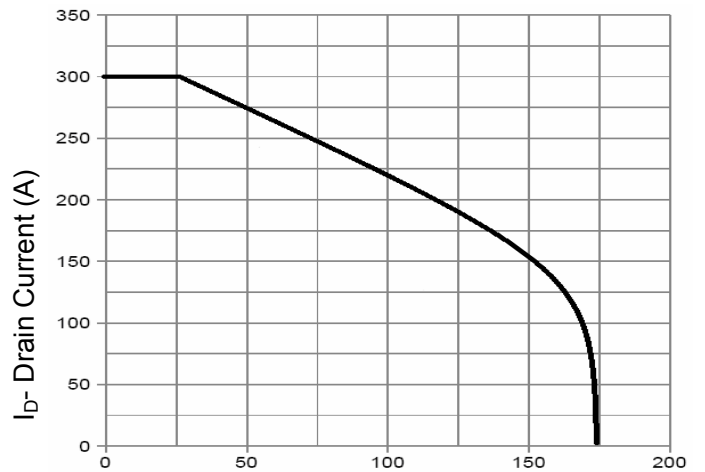

T_J-Junction Temperature (°C)
Figure 10 Current De-rating

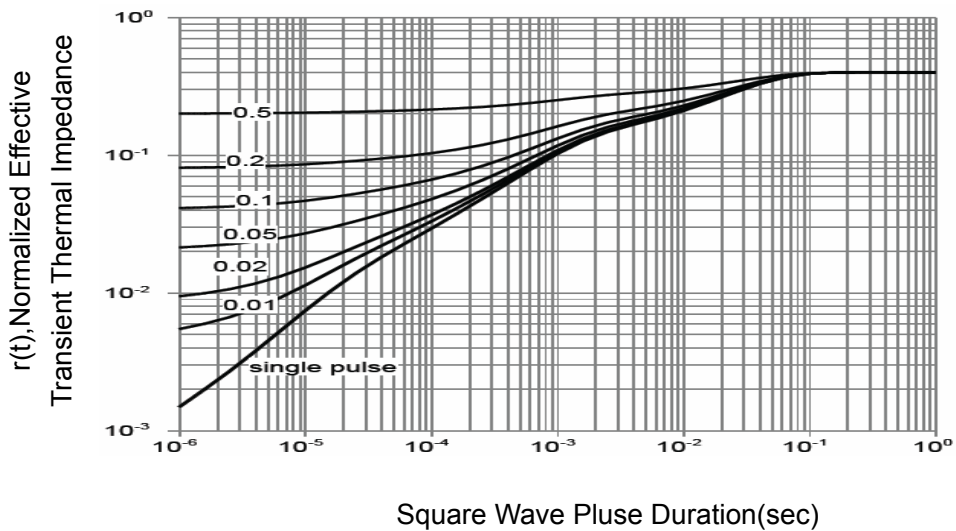


Square Wave Pluse Duration(sec)
Figure 11 Normalized Maximum Transient Thermal Impedance

TO-220-3L Package Information



| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|--------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 4.400 | 4.600 | 0.173 | 0.181 |
| A1 | 2.250 | 2.550 | 0.089 | 0.100 |
| b | 0.710 | 0.910 | 0.028 | 0.036 |
| b1 | 1.170 | 1.370 | 0.046 | 0.054 |
| c | 0.330 | 0.650 | 0.013 | 0.026 |
| c1 | 1.200 | 1.400 | 0.047 | 0.055 |
| D | 9.910 | 10.250 | 0.390 | 0.404 |
| E | 8.9500 | 9.750 | 0.352 | 0.384 |
| E1 | 12.650 | 12.950 | 0.498 | 0.510 |
| e | 2.540 TYP. | | 0.100 TYP. | |
| e1 | 4.980 | 5.180 | 0.196 | 0.204 |
| F | 2.650 | 2.950 | 0.104 | 0.116 |
| H | 7.900 | 8.100 | 0.311 | 0.319 |
| h | 0.000 | 0.300 | 0.000 | 0.012 |
| L | 12.900 | 13.400 | 0.508 | 0.528 |
| L1 | 2.850 | 3.250 | 0.112 | 0.128 |
| V | 6.900 REF. | | 0.276 REF. | |
| Φ | 3.400 | 3.800 | 0.134 | 0.150 |

TO-263-2L Package Information

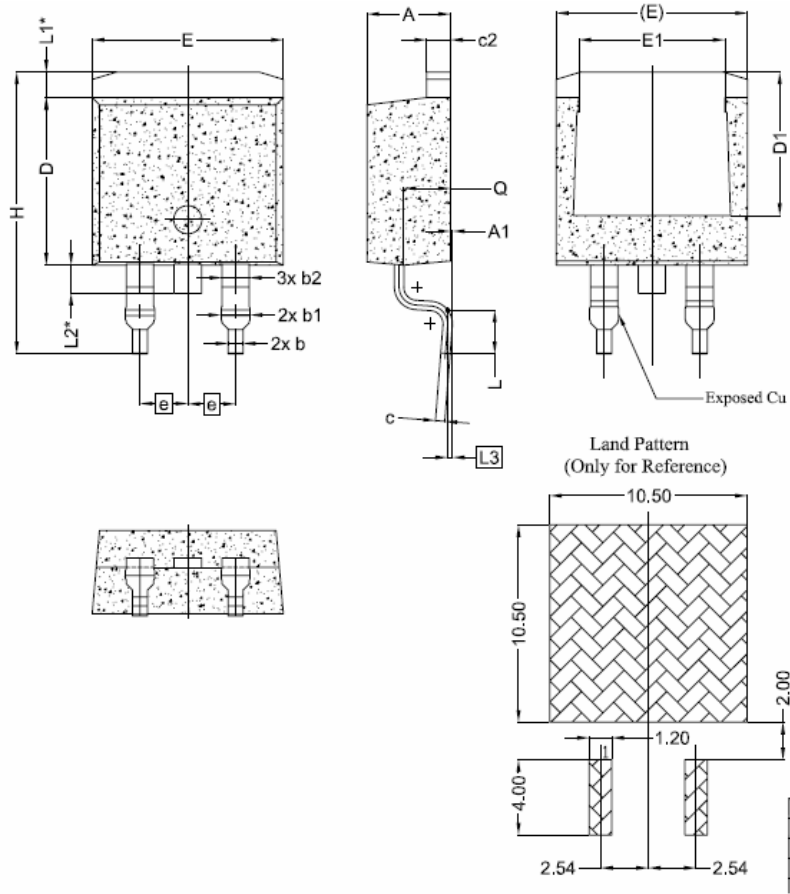

| SYMBOL | DIMENSIONS | | |
|--------|------------|-------|-------|
| | MIN. | NOM. | MAX. |
| A | 4.24 | 4.44 | 4.64 |
| A1 | 0.00 | 0.10 | 0.25 |
| b | 0.70 | 0.80 | 0.90 |
| b1 | 1.20 | 1.55 | 1.75 |
| b2 | 1.20 | 1.45 | 1.70 |
| c | 0.40 | 0.50 | 0.60 |
| c2 | 1.15 | 1.27 | 1.40 |
| D | 8.82 | 8.92 | 9.02 |
| D1 | 6.86 | 7.65 | — |
| E | 9.96 | 10.16 | 10.36 |
| E1 | 6.89 | 7.77 | 7.89 |
| e | 2.54 BSC | | |
| H | 14.61 | 15.00 | 15.88 |
| L | 1.78 | 2.32 | 2.79 |
| L1 | 1.36 REF. | | |
| L2 | 1.50 REF. | | |
| L3 | 0.25 BSC | | |
| Q | 2.30 | 2.48 | 2.70 |

Attention

QIAOXIN assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all QIAOXIN products described or contained herein. QIAOXIN products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. QIAOXIN reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.