

## Surface Mount Transient Voltage Suppressors

### TPSMC Series 12 To 91V 1500W

#### Description

TVS diodes can be used in a wide range of applications which like consumer electronic products, automotive industries, munitions, telecommunications, aerospace industries, and intelligent control systems.

Working Voltage: 12 to 91 V

Peak Pulse Power: 1500 W


#### Features

- ◆ Glass passivated chip
- ◆ 1500W peak pulse power capability with a 10/1000 us waveform, repetitive rate (duty cycle):0.01 %
- ◆ High reliability application and automotive grade AEC Q101 qualified
- ◆ Low leakage
- ◆ Uni and Bidirectional unit
- ◆ Excellent clamping capability
- ◆ Very fast response time
- ◆ RoHS compliant


#### Application

TVS devices are ideal for the protection of I/O interfaces,  $V_{CC}$  bus and other vulnerable circuits used in Telecom, Computer, Industrial and Consumer electronic applications.

Uni-directional



Bi-directional



#### Mechanical Data

- ◆ Case: Molded plastic
- ◆ Epoxy: UL 94V-0 rate flame retardant
- ◆ Lead: Solderable per MIL-STD-750, method 2026
- ◆ Polarity: Color band denotes cathode end except Bipolar
- ◆ Mounting position: Any

#### Maximum Ratings and Thermal Characteristics(TA=25°C Unless otherwise noted)

Parameter	Symbol	Value	Units
<b>Peak power dissipation with a 10/1000 <math>\mu</math>s waveform<sup>(1)</sup></b>	$P_{PPM}$	1500	W
<b>Power Dissipation on Infinite Heat Sink at <math>T_L=75^\circ C</math></b>	$P_D$	6.5	W
<b>Peak pulse current with a 10/1000 <math>\mu</math>s waveform<sup>(1)</sup></b>	$I_{PP}$	See Next Table	A
<b>Junction and storage temperature range</b>	$T_J, T_{STG}$	-55 to +175	°C
<b>Operating temperature range</b>	$T_{OP}$	-55 to +150	°C
<b>Maximum Instantaneous Forward Voltage at 50A for Unidirectional<sup>(3)</sup></b>	$V_F$	3.5/5.0	V
<b>Peak forward surge current, 8.3 ms single half sine-wave unidirectional only<sup>(2)</sup></b>	$I_{FSM}$	200	A

#### Note:

(1)Non-repetitive current pulse per Fig.5 and derated above  $T_A= 25^\circ C$ per Fig.1

(2)Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum

(3) $V_F < 3.5V$  for devices of  $V_{BR} < 200V$  and  $V_F < 5.0V$  for devices of  $V_{BR} > 201V$

## Surface Mount Transient Voltage Suppressors

TPSMC Series 12 To 91V 1500W

Electrical Characteristics(@25C unless otherwise Specified)

Part Number		Marking		Reverse Stand-Off Voltage V <sub>RWM</sub> (V)	Breakdown Voltage V <sub>BR</sub> (V) @I <sub>T</sub>		Test Current I <sub>T</sub> (mA)	Maximum Clamping Voltage V <sub>C</sub> @I <sub>PP</sub> (V)	Maximum Peak Pulse Current I <sub>PP</sub> (A)	Maximum Reverse Leakage I <sub>R</sub> @V <sub>RWM</sub> (μA)
Uni	Bi	Uni	Bi		MIN	MAX				
TPSMC12A	TPSMC12CA	12AA	12CA	10.2	11.40	12.60	1	16.7	89.82	5
TPSMC13A	TPSMC13CA	13AA	13CA	11.1	12.35	13.65	1	18.2	82.42	1
TPSMC15A	TPSMC15CA	15AA	15CA	12.8	14.25	15.75	1	21.2	70.75	1
TPSMC16A	TPSMC16CA	16AA	16CA	13.6	15.20	16.80	1	22.5	66.67	1
TPSMC18A	TPSMC18CA	18AA	18CA	15.3	17.10	18.90	1	25.2	59.52	1
TPSMC20A	TPSMC20CA	20AA	20CA	17.1	19.00	21.00	1	27.7	54.15	1
TPSMC22A	TPSMC22CA	22AA	22CA	18.8	20.90	23.10	1	30.6	49.02	1
TPSMC24A	TPSMC24CA	24AA	24CA	20.5	22.80	25.20	1	33.2	45.18	1
TPSMC27A	TPSMC27CA	27AA	27CA	23.1	25.65	28.35	1	37.5	40.00	1
TPSMC30A	TPSMC30CA	30AA	30CA	25.6	28.50	31.50	1	41.4	36.23	1
TPSMC33A	TPSMC33CA	33AA	33CA	28.2	31.35	34.65	1	45.7	32.82	1
TPSMC36A	TPSMC36CA	36AA	36CA	30.8	34.20	37.80	1	49.9	30.06	1
TPSMC39A	TPSMC39CA	39AA	39CA	33.3	37.05	40.95	1	53.9	27.83	1
TPSMC43A	TPSMC43CA	43AA	43CA	36.8	40.85	45.15	1	59.3	25.30	1
TPSMC47A	TPSMC47CA	47AA	47CA	40.2	44.65	49.35	1	64.8	23.15	1
TPSMC51A	TPSMC51CA	51AA	51CA	43.6	48.45	53.55	1	70.1	21.40	1
TPSMC56A	TPSMC56CA	56AA	56CA	47.8	53.20	58.80	1	77.0	19.48	1
TPSMC62A	TPSMC62CA	62AA	62CA	53.0	58.90	65.10	1	85.0	17.65	1
TPSMC68A	TPSMC68CA	68AA	68CA	58.1	64.60	71.40	1	92.0	16.30	1
TPSMC75A	TPSMC75CA	75AA	75CA	64.1	71.25	78.75	1	103.0	14.56	1
TPSMC82A	TPSMC82CA	82AA	82CA	70.1	77.90	86.10	1	113.0	13.27	1
TPSMC91A	TPSMC91CA	91AA	91CA	77.8	86.45	95.55	1	125.0	12.00	1

**Note:**

- (1) The available parts are "A" type only, the parts without A(VBR is ±10%) is not available
- (2) Add suffix 'C' or ' CA ' after part number to specify Bi-directional devices
- (3) For Bi-Directional devices having VR of 10 volts and under, the IR limit is double

Ratings and Characteristics Curves(TA=25C unless otherwise noted)

Figure 1-Pulse Waveform


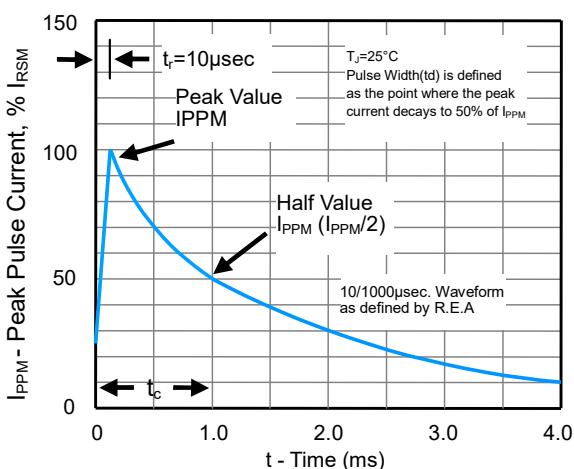


Figure 2-Pulse Derating Curve

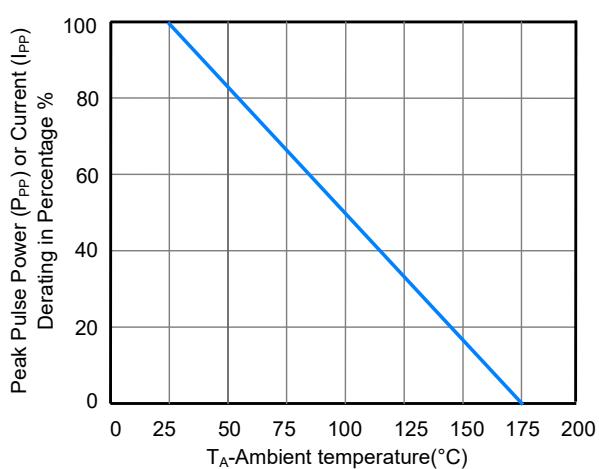

## Surface Mount Transient Voltage Suppressors

TPSMC Series 12 To 91V 1500W

Figure 3-Peak Pulse Power Rating Curve

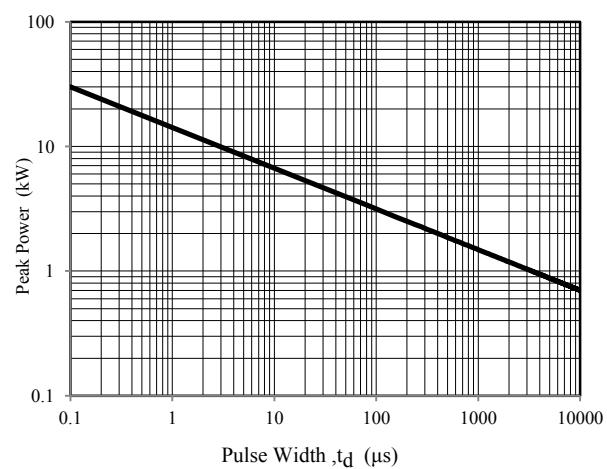


Figure 4-Steady State Power Derating Curve

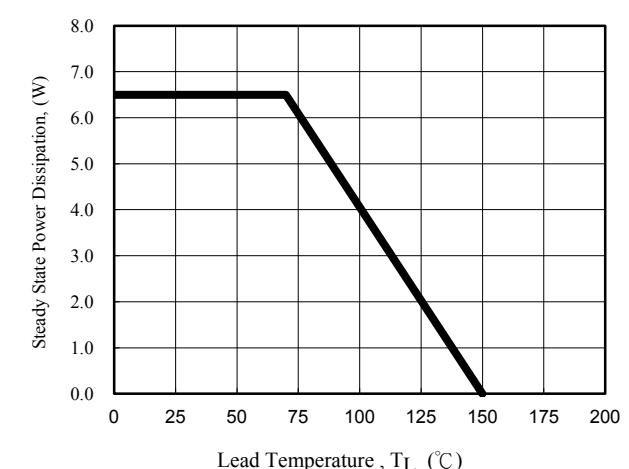


Figure 5-Maximum Non-Repetitive Surge Current



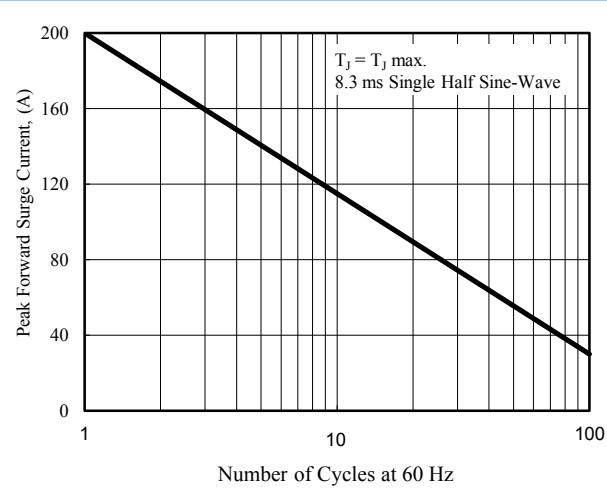


Figure 6-Typical Junction Capacitance

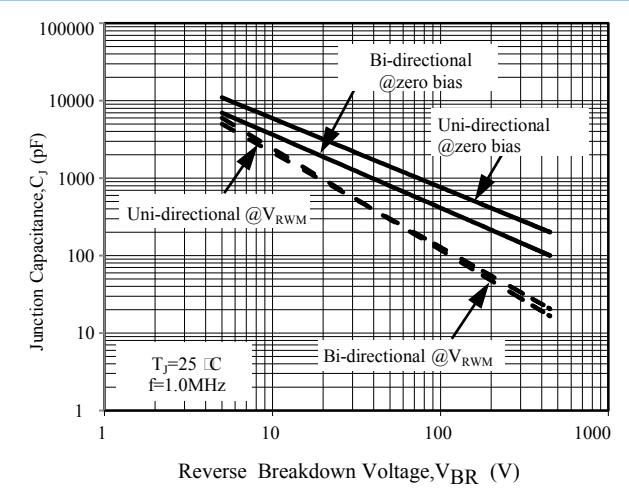


Parting Numbering

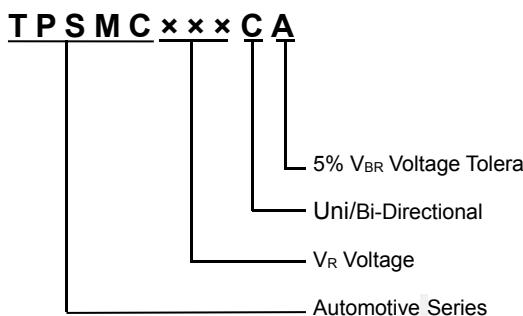

## Surface Mount Transient Voltage Suppressors


TPSMC Series 12 To 91V 1500W

### Soldering Parameters

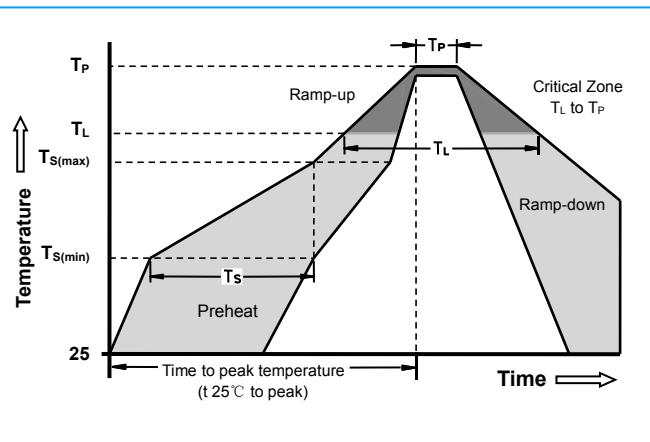

Reflow Condition		Lead-free assembly
Pre Heat	-Temperature Min ( $T_{s(min)}$ )	150°C
	-Temperature Max ( $T_{s(max)}$ )	200°C
	- Time (min to max) ( $t_s$ )	60 -180 Seconds
Average ramp up rate ( Liquidus Temp $T_L$ to peak)		3°C/second max
$T_{s(max)}$ to $T_L$ - Ramp-up Rate		3°C/second max
Reflow	- Temperature ( $T_L$ ) (Liquidus)	217°C
	- Time (min to max) ( $t_s$ )	60 -150 Seconds
Peak Temperature ( $T_P$ )		260 +0/-5°C
Time within 5°C of actual peak Temperature ( $t_p$ )		20 -40 Seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature ( $T_P$ )		8 minutes Max
Do not exceed		280°C

### Dimensions

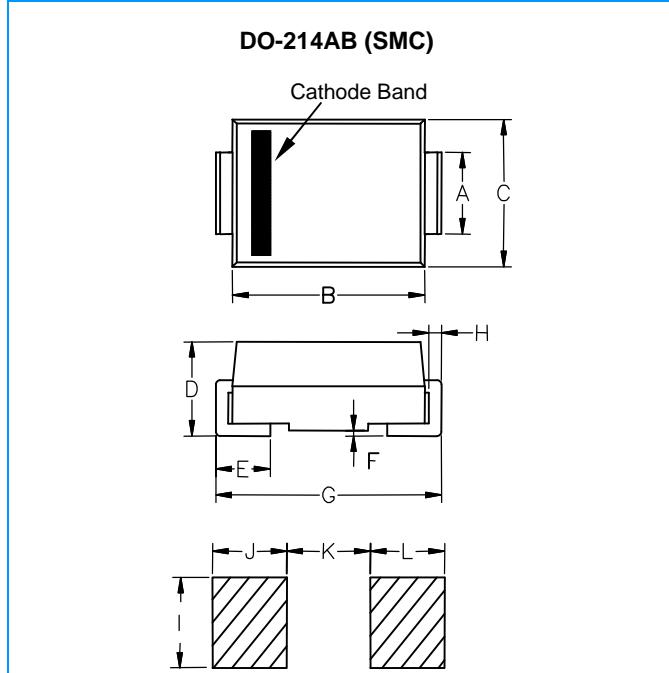

Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	0.114	0.126	2.86	3.160
B	0.260	0.280	6.520	7.020
C	0.220	0.245	5.520	6.150
D	0.079	0.103	1.980	2.590
E	0.030	0.060	0.750	1.510
F	-	0.008	-	0.203
G	0.305	0.320	7.640	8.020
H	0.006	0.012	0.152	0.305
I	0.129	-	3.300	-
J	0.094	-	2.400	-
K	-	0.165	-	4.200
L	0.094	-	2.400	-