

Transient Voltage Suppressors for ESD Protection

LC3342S8

Description


The LC3342S8 is TVS arrays designed to protect high speed data interfaces. This series has been specifically designed to protect sensitive components which are connected to high-speed data and transmission lines from over-voltage caused by ESD (electrostatic discharge), CDE (Cable Discharge Events), and EFT (electrical fast transients).



Feature

- ◆ 70 Watts Peak Pulse Power per Line ($t_p=8/20\mu s$)
- ◆ Protects Four 10/100/1000 Ethernet Lines
- ◆ Low clamping voltage
- ◆ Working voltages : 3.3V
- ◆ RoHS Compliant
- ◆ IEC61000-4-4 (EFT) 40A (5/50ns)
- ◆ IEC61000-4-5 (LIGHTING) 8.5A (8/20 μs)
- ◆ IEC61000-4-2(ESD): $\pm 30kV$ (air discharge)
 $\pm 30kV$ (contact discharge);

Functional Diagram

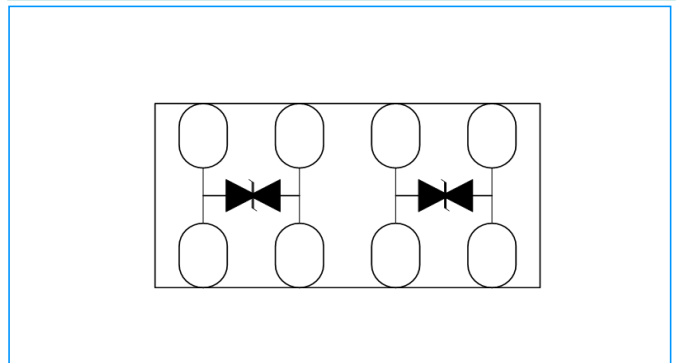

Applications

- ◆ 10/100/1000 Ethernet
- ◆ Integrated magnetics/RJ-45 connectors
- ◆ LAN/WAN Equipment
- ◆ Security Cameras
- ◆ Industrial Controls
- ◆ Peripherals
- ◆ Notebooks & Desktop Computers

Mechanical Data

- ◆ DFN2010S8 Package
- ◆ Molding Compound Flammability Rating : UL 94V-0
- ◆ Weight 1.0 Milligrams (Approximate)
- ◆ Lead Finish : Lead Free

Mechanical Characteristics

Symbol	Parameter	Value	Units
P_{PP}	Peak Pulse Power ($t_p=8/20\mu s$ waveform)	70	Watts
T_L	Lead Soldering Temperature	260 (10 sec.)	$^{\circ}C$
T_{STG}	Storage Temperature Range	-55 to +150	$^{\circ}C$
T_J	Operating Junction Temperature Range	-40 to +125	$^{\circ}C$

Transient Voltage Suppressors for ESD Protection

LC3342S8

Electrical Characteristics (@25°C Unless Otherwise Specified)

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Reverse Working Voltage	V_{RWM}	--	--	--	3.3	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$;	3.6	--	--	V
Reverse Leakage Current	I_R	$V_{RWM}=3.3V, T=25^\circ C$;	--	--	0.05	μA
Positive Clamping Voltage	V_C	$I_{PP}=8.5A, T_P=8/20\mu s$;	--	--	8.3	V
Junction capacitance	C_J	$V_R=0V, f=1MHz$;	--	8.0	--	pF

Characteristic Curves

Fig1. 8/20 μs Pulse Waveform

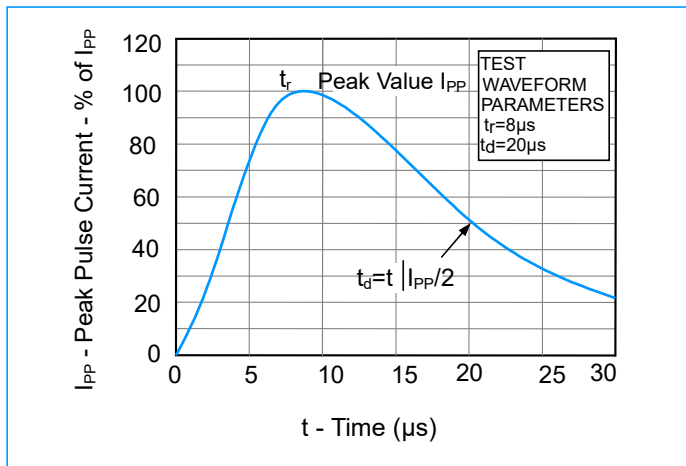


Fig2. Power Rating Derating Curve

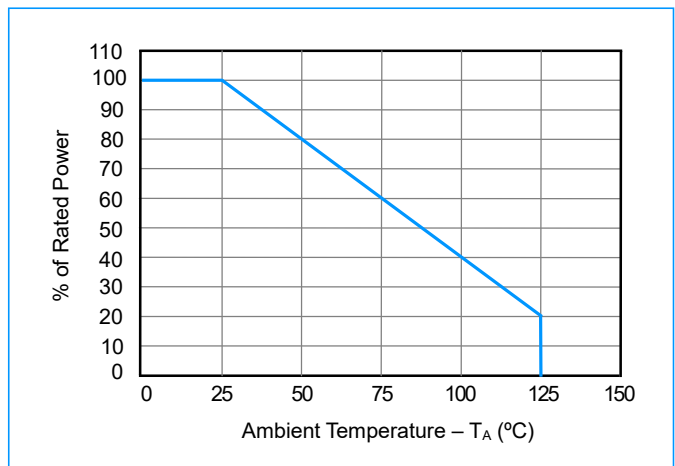


Fig3. ESD Pulse Waveform (according to IEC 61000-4-2)


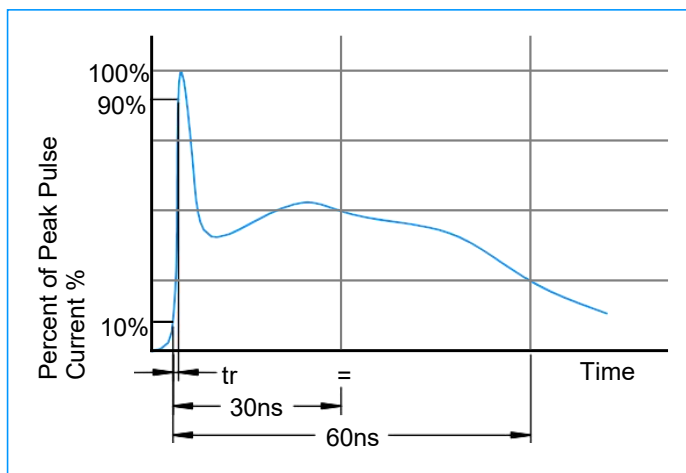


Fig4. Clamping Voltage vs. Peak Pulse Current ($t_p=8/20 \mu s$)

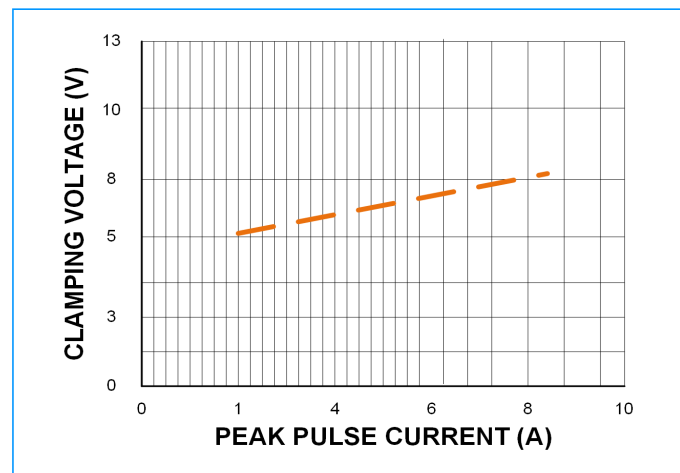

Transient Voltage Suppressors for ESD Protection

LC3342S8

Characteristic Curves

Fig5. Typical Breakdown Voltage vs. Temperature

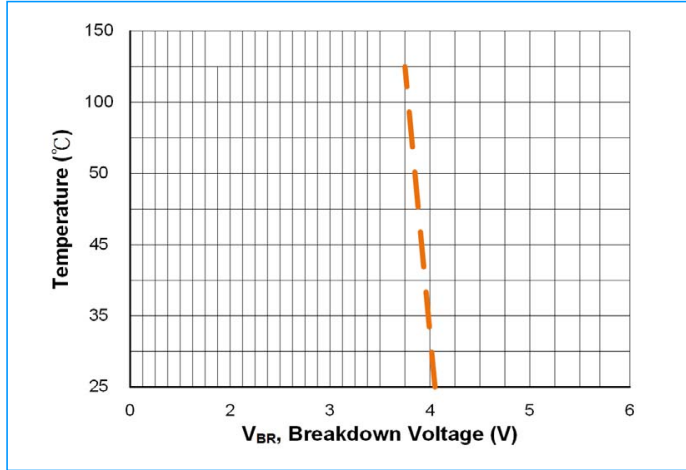


Fig6. Typical Reverse Current vs. Temperature


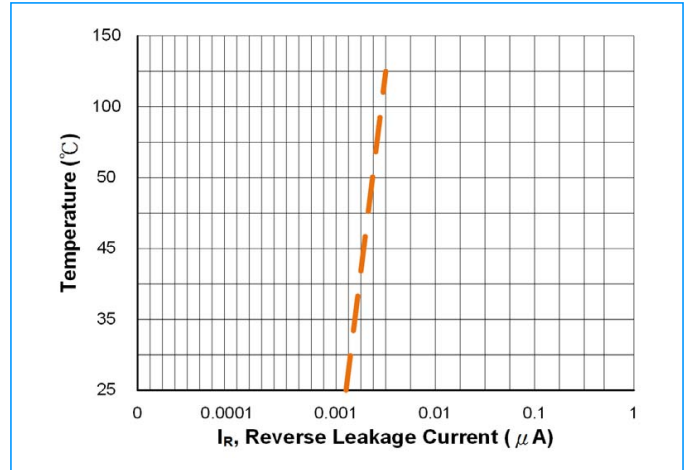


Fig7. Typical Capacitance vs. Reverse Voltage

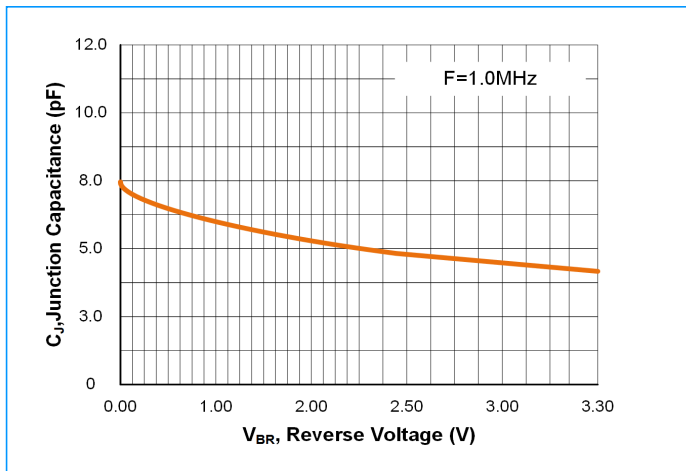


Transient Voltage Suppressors for ESD Protection

LC3342S8

Transmission Line Pulse(TLP)

Transmission Line Pulse (TLP) is a measurement technique used in the Electrostatic Discharge (ESD) arena to characterize performance attributes of devices under ESD stresses. TLP is able to obtain current versus voltage (I-V) curves in which each data point is obtained with a 100 ns long pulse, with currents up to 40 A. TLP was first used in the ESD field to study human body model (HBM) in integrated circuits, but it is an equally valid tool in the field of system level ESD. The applicability of TLP to system level ESD is illustrated in Figure 1, which compares an 8 kV IEC 61000-4-2 current waveform with TLP current pulses of 8 and 16 A. The current levels and time duration for the pulses are similar and the initial rise time for the TLP pulse is comparable to the rise time of the IEC 61000-4-2's initial current spike. This application note will give a basic introduction to TLP measurements and explain the datasheet parameters extracted from TLP for SDI Technology's protection products.

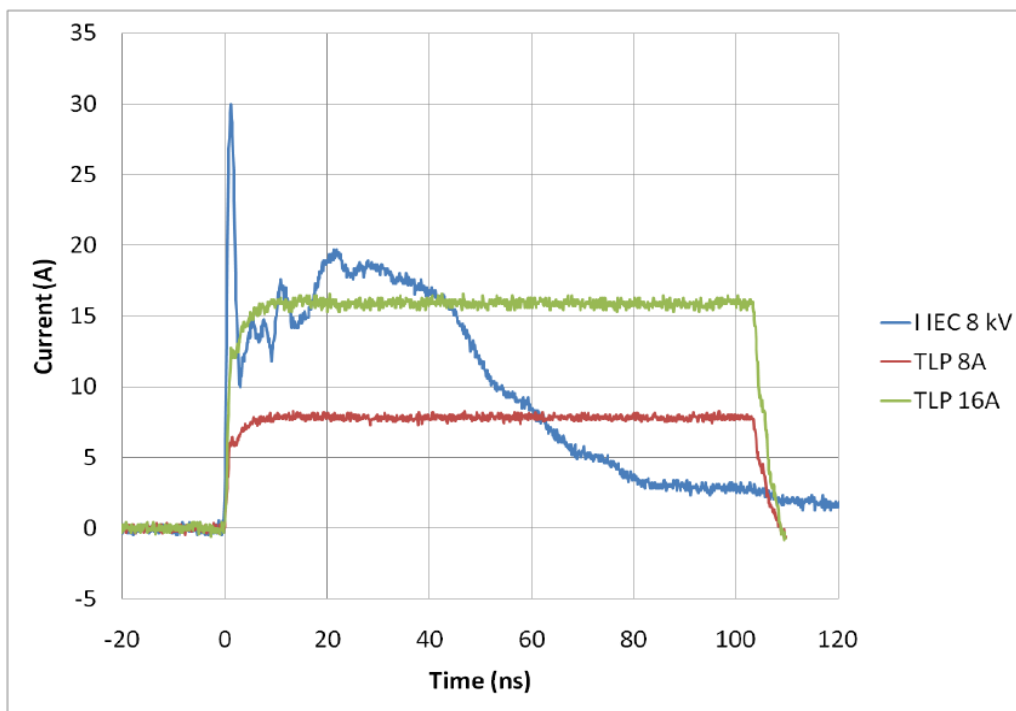

Comparison
Between 8 kV IEC
61000-4-2 and 8
A and 16 A TLP
Waveforms

Comparison of a Current Waveform of IEC 61000-4-2 with TLP Pulses at 8 and 16 A.

The IEC 61000-4-2 ESD waveform is true to the Standard and is shown here as captured on an oscilloscope.


The points A, B, and C show the points on the waveforms specified in IEC 61000-4-2.

Transmission Line Pulse (TLP) Version.

Transient Voltage Suppressors for ESD Protection

LC3342S8

DFN2010S8 Package Outline&Dimensions

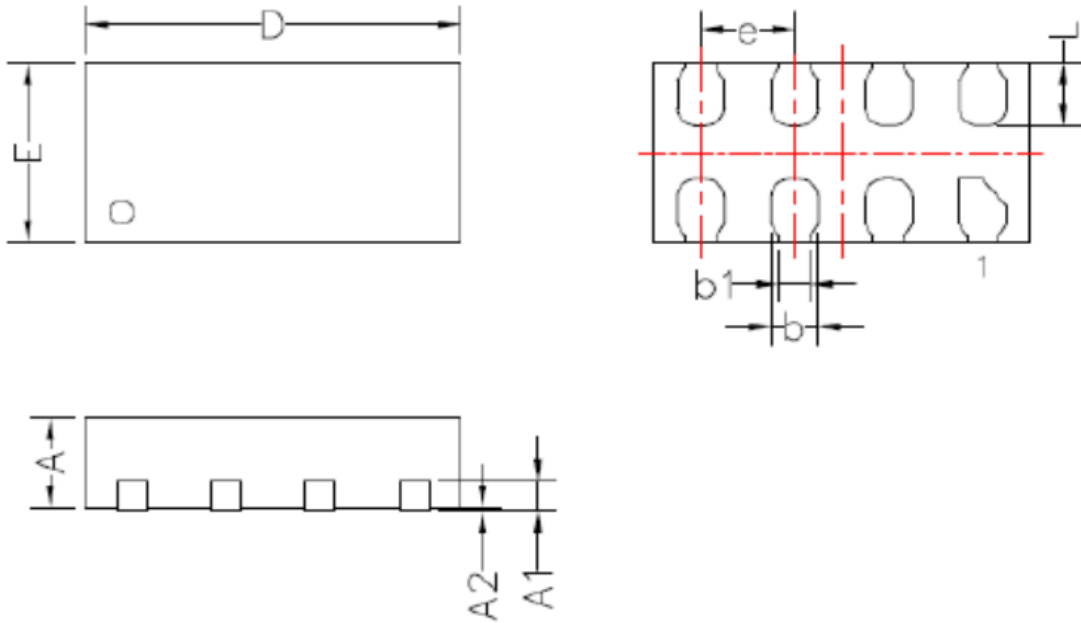

Package Dimensions		Unit:mm		
Symbols	Min	Nom	Max	
A	0.45	0.50	0.55	
A1	0.15REF			
A2	0.00	0.02	0.05	
D	1.95	2.00	2.05	
E	0.95	1.00	1.05	
L	0.30	0.35	0.40	
b	0.20	0.25	0.30	
B1	0.15REF			
e	0.50BSC			

Ordering Information

Device	Marking	Package	Quantity	Reel Size
LC3324S8	33T8	DFN2010S8	3,000pcs/Reel	7 inch